


**PRO-30 PRO-30E
PRO-40 PRO-40E
GENERAL SERVICE**

- ✓ 30,000 lbs & 40,000 lbs lifting capacity;
- ✓ AMGO ETL certified power unit comes as standard.
- ✓ Mechanical self-locking safety device with air-driven lock release.
- ✓ Both primary multiple safety locks and cable-slack protection system are equipped as standard.
- ✓ Cable-driven, utilizing aircraft standard high quality cables.
- ✓ Hydraulic cylinder is designed and made to high standard, utilizing high quality oil seals and compensation valve.
- ✓ Non-skid diamond platforms.



Double-safety locks

FEATURES




- Air controlled safety device.




- ETL certified AMGO powerunit .



- Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories.
Kits No.: 40106A



- Optional length extension kits adds an extra 29" length on the platform.
Kits No.: 43001(PRO-30 only)




- Optional Rolling Jacks:
RJ-20A 20,000lbs

PRO-SERIES Equipment

SPECIFICATIONS

Model		PRO-30	PRO-30E	PRO-40	PRO-40E
Lifting Capacity		30,000lbs	30,000lbs	40,000lbs	40,000lbs
Lifting Time		133S	133S	183S	183S
Overall Length(Inc Ramps)	A	307 1/8"	366 1/8"	366 1/8"	425 3/16"
Overall Length(No Inc. Ramps)	B	256 7/16"	315 1/2"	315 1/2"	374 9/16"
Overall Width	C	149 3/8"	149 3/8"	161 7/16"	161 7/16"
Width Between Columns	D	131 13/16"	131 13/16"	143 7/8"	143 7/8"
Max. Lifting Height		74 13/16"	74 13/16"	74 13/16"	74 13/16"
Max. Lock Height to top of runway	E	71 11/16"	71 11/16"	71 11/16"	71 11/16"
Overall Height	F	91 13/16"	91 13/16"	91 13/16"	91 13/16"
Minimum Height	G	10 7/16"	10 7/16"	10 7/16"	10 7/16"
Max. Underneath Height		65 7/8"	65 7/8"	65 7/8"	65 7/8"
Max. Lock Underneath runway	H	62 3/4"	62 3/4"	62 3/4"	62 3/4"
Drive-Thru Clearance	I	117 13/16"	117 13/16"	129 7/8"	129 7/8"
Width Between Runways	J	44 7/8"-54 3/4"	44 7/8"-54 3/4"	49 1/16"-58 7/8"	49 1/16"-58 7/8"
Outside Edge of Runways	K	92 15/16"-102 3/4"	92 15/16"-102 3/4"	104 15/16"-114 13/16"	104 15/16"-114 13/16"
Gross Weight		5,461lbs	6,676 lbs	8,283 lbs	9,306 lbs
Motor		2.0HP, 220V / 60Hz, single phase			

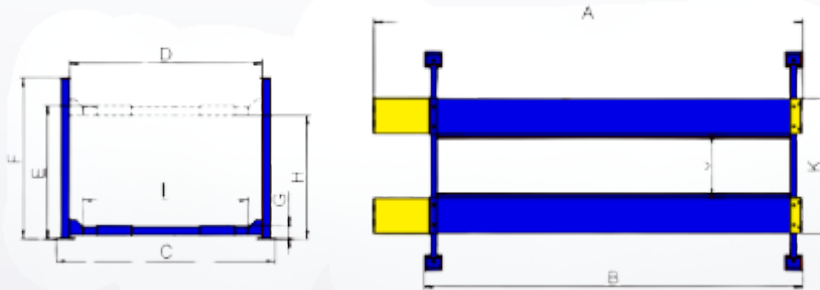

FOUR POST SUPER DUTY GENERAL SERVICE

Heavy Duty Truck Lifts are newly engineered lifts that makes light work out of heavy lifting.



Optional Rolling Jack
RJ-20A: pneumatic hydraulic type 20,000lbs



PRO-30
PRO-30E
PRO-40
PRO-40E