





**SPECIFICATIONS**

Model	PSEOH-910	PSEOH-1010
Lifting Capacity	9,000lbs	10,000lbs
Lifting Time	57S	57S
Lifting Height	71.5" ~ 80.5" (1815-2044mm)	71 1/2" ~ 80 1/2" (1815-2044mm)
Overall Height	142.5" ~ 150.5" (3621/3621mm)	142 1/2" / 150 1/2" (3621/3821mm)
Overall Width	135" (3428mm)	135" (3428mm)
Drive-Thru Clearance	99.5" (2528mm)	99 1/2" (2528mm)
Front arms	24.25" ~ 42.25" (615-1073mm)	25 5/8" ~ 41 3/8" (652-1052mm)
Rear arms	38.4" ~ 58.2" (975-1475mm)	38 1/4" ~ 56 7/8" (970-1445mm)
Width Between Columns	112.5" (2850mm)	112 1/4" (2850mm)
Minimum Pad Height	3/5" (90mm)	3 1/2" (90mm)
Motor	2.0HP, 220V/60Hz, single phase	2.0HP, 220V/60Hz, single phase
Gross Weight	1,515lbs (687kg)	1,623lbs (736kg)

**ASYMMETRIC LIFTS**

TWO POST

*The asymmetric lifts model PSEOH Series are designed with asymmetric arms but also can be configured with symmetric*




DWI Power Systems - [www.DWIProSeries.com](http://www.DWIProSeries.com)  
Home of Pro Series Equipment  
130 Commerce Drive  
Franklin, IN 46131  
888-736-5094

## TWO-POST ASYMMETRIC LIFTS

*With standard features that include adjustable height, direct drive, powder coat finishing, stackable rubber pads and other appealing features, the PSE series lift accommodates the most demanding lift requirements.*

- ✓ Dual hydraulic direct-driven cylinders made to high standards.
- ✓ Asymmetric Arm Design, makes finding the lift point of the car easier.
- ✓ 3/8" aircraft quality cable is used for synchronization.
- ✓ Single-point safety release, allows the operator to disengage both columns simultaneously.
- ✓ UHMW Polyethylene sliders and bronze bushings.
- ✓ Clear-floor design, provide unobstructed floor use.
- ✓ Overhead safety stop device prevents vehicle damage.
- ✓ Stackable rubber pads and 1.5"/2.5"/5" adapters as standard supply.
- ✓ Standard adjustable heights accommodates varying ceiling heights.
- ✓ PSE 5-3-2 Warranty

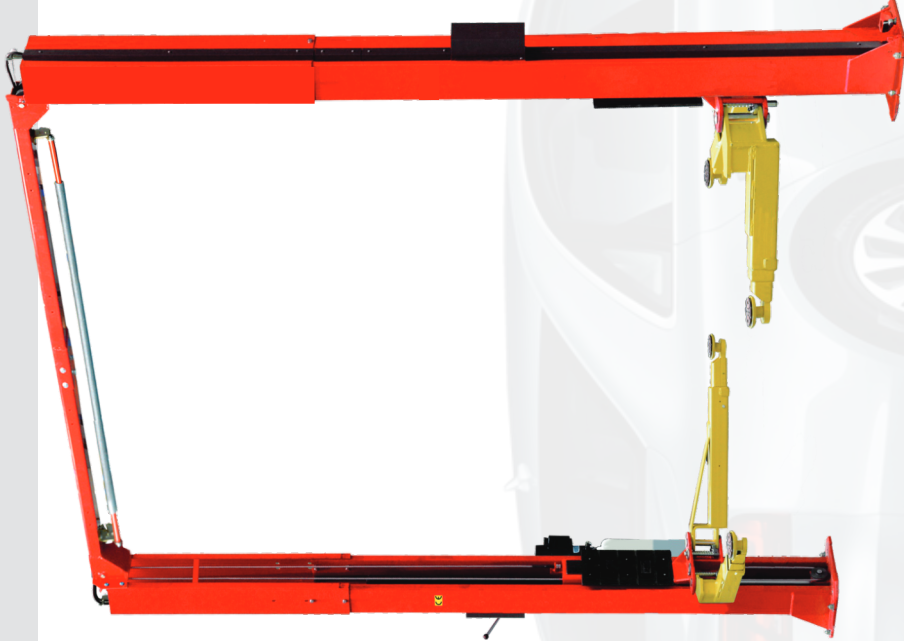

### Asymmetric arms

Asymmetric arms allow you to load different vehicles in an asymmetric or symmetric configuration. Self-lubricating UHMW polyethylene sliders, rubber door guards to protect your vehicle.



Safety arm lock, automatic release device, high strength gear rack, more stable and safer.



### Extension adapters


With three different sizes of stackable adapters to adjust the height of rubber pad freely.



### Truck Adapter (Optional)

Perfect choice for wide size SUV vehicles light trucks and heavy-duty trucks.  
Kits No. PSE-20902 (SUV and light trucks)  
Kits No. PSE-21103 (Heavy-duty trucks)


## FEATURES

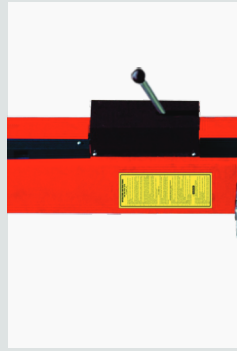

- Single Point safety release makes it easy for the operator to unlock both column locks from one column



- Dual hydraulic direct-driven cylinders

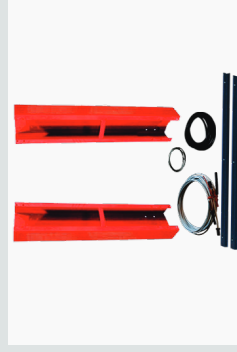

- Optional Height Extension Kits  
With this kits, the height can be adjusted from 3827mm (150.5")  
Kits No. PSE-20902 (PSEOH-910)  
Kits No. PSE-21002 (PSEOH-1010)



- Optional Width Extension Kits  
With these kits the width between posts is adjusted from 2850mm (112 1/4") to 3000mm (118 1/8")  
Kits No. PSE-20906 (PSEOH-910/1010)

## ASYMMETRIC DESIGN ARMS, OPEN-DOOR CLEARANCE

The OH series lift features our innovative super asymmetric technology providing the versatility to lift vehicles both symmetrically and asymmetrically upon demand.

The warranty of the lifts:

- 5 years for steel construction,
- 3 years for hydraulic parts,
- 2 years for electrical components.