

HEAVY DUTY MOBILE COLUMN



PRO-SERIES
Equipment
 888-736-5094
www.ProSeriesEquipment.com

PSEMU-18


SPECIFICATIONS

Model		PSEMU-18
Locking release		Electric
Lifting Capacity		18,000lbs
Lifting Time		85S
Lifting Height	A	66 15/16"-70 7/8"(1700-1800mm)
Minimum Pad Height	B	6 1/4"(159mm)
Overall Height	C	155 13/16"(3957mm)
Overall Width	D	52 1/16"(1323mm)
Motor		2.2kW
Oil reservoir		12.5L
Voltage control		DC24V
Relief Pressure		14.5Mpa
Approximate Tire Size		23 5/8"-49 7/32"(600-1250mm)

HEAVY DUTY MOBILE COLUMN WIRED AND WIRELESS DATA COMMUNICATION

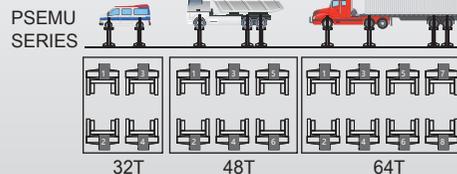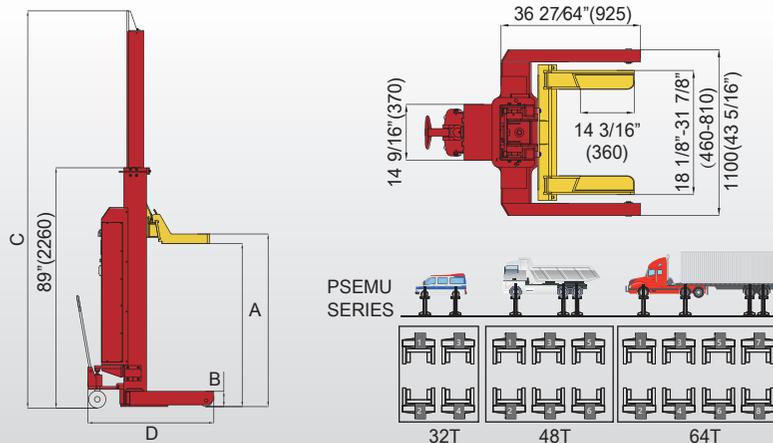

SOLD SEPARATELY



Height extension support (PSE-MU20003) and Beam support (PSE-MU20004)



Crossbeam support (PSE-MU20001) and Triangle height extension support (PSE-MU20002)



Supporting frame (PSE-MUJ-20001)

Pro Series Equipment - Distributed By

DWI Power Systems - www.DWIProSeries.com
 Home of Pro Series Equipment
 130 Commerce Drive
 Franklin, IN 46131
 317-736-5094



HEAVY DUTY MOBILE COLUMN

WIRED AND WIRELESS DATA COMMUNICATION

- ✓ Each column has a maximum lifting capacity of 18,000lbs.
- ✓ Multiple group communications (Maximum 48 columns).
- ✓ Wired and wireless data communication.
- ✓ Double safety guaranteed by mechanical and hydraulic locking systems.
- ✓ Synchronization achieves by using microchip technology in the control system.
- ✓ Touch screen control, Real-time lifting height.
- ✓ Emergency stop button on each column.
- ✓ Using the access ID card, any column in the group can become the control column.
- ✓ Audible warning for the final travel of lowering movement.
- ✓ The lifting system is battery powered. Each column has a charger rating AC110-240V-1Ph.
- ✓ DC24V safe control voltage.
- ✓ Adjustable wheel pick-up fork accommodates tire diameter from 23 5/8" to 49 7/32".
- ✓ HMI screen for setting networks and displaying crucial parameters.



FEATURES



Touch screen control



Control is only permitted at a authorized column



Accurate control for synchronization



Adjustable wheel supports accommodate tire diameters from 23 5/8" to 49 7/32"

HEAVY DUTY MOBILE COLUMN

5/3/2 WARRANTY POLICY

5 years for lift structure

3 years for hydraulic components

2 years for electrical parts